



Datasheet

# THRESHOLD ANTENNA

## READER ANTENNA DATASHEET

Version 3.0

© 2018, Impinj, Inc.

## TABLE OF CONTENTS

<b>1</b>	<b>Overview</b> .....	<b>1</b>
1.1	Features.....	1
<b>2</b>	<b>Read Zone Characteristics</b> .....	<b>1</b>
<b>3</b>	<b>Specifications</b> .....	<b>2</b>
3.1	Electrical Specifications.....	2
3.1.1	Field Plots .....	3
3.2	Environmental Specifications .....	7
3.3	Mechanical Specifications .....	7
3.3.1	Mechanical Drawings .....	8
<b>4</b>	<b>Ordering Information</b> .....	<b>8</b>
<b>5</b>	<b>Notices</b> .....	<b>9</b>

## 1 OVERVIEW

The Impinj Threshold RAIN RFID antenna provides wide zone coverage ideal for a road race course or other boundary or threshold crossings. The Impinj Threshold antenna has a very wide beam width to maximize zone coverage. Threshold antennas provide a consistent and continuous read zone when linearly distributed head-to-tail. At 46cm x 9cm x 2 cm, the Threshold antenna's planar form factor fits readily onto fencing or other borders.

Figure 1: Antenna Picture




### 1.1 Features

- Bespoke design for boundary/threshold crossings
- Purpose built to provide a curtain of coverage across wider thresholds
- Low profile form factor of 46cm x 9cm x 2 cm,
- FCC and ETSI versions available

## 2 READ ZONE CHARACTERISTICS

The Threshold antenna's wide beam width provides extensive coverage across a boundary edge. By lining Threshold antennas up along the short edge, one continuous read zone may be established along a boundary line.

**Figure 2: Threshold Antenna Read Zone Diagram**

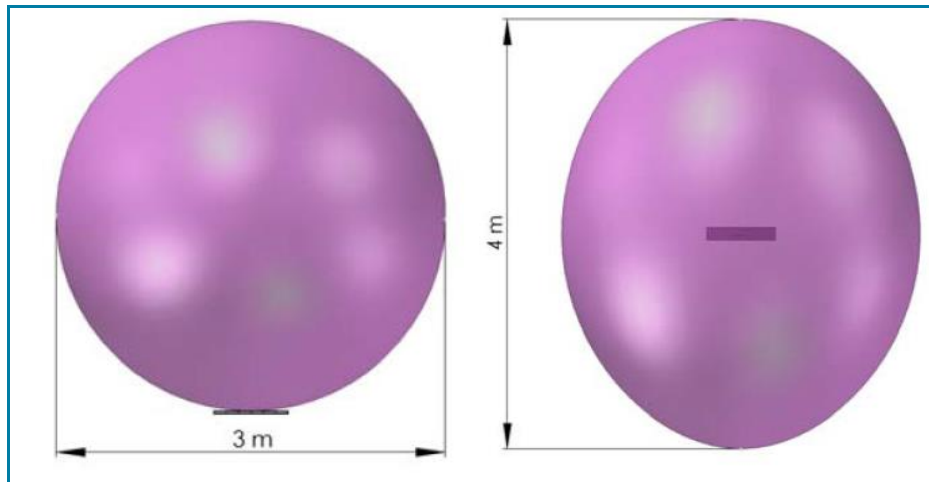

## 3 SPECIFICATIONS

### 3.1 Electrical Specifications


**Table 1: Electrical Specifications**

PARAMETER	VALUE
Frequency Range	FCC: 902-928 MHz
	ETSI: 865-868 MHz
Polarization	Linear (Parallel to Short Axis)
Far-Field Gain	5.0 dBi
Far-Field 3 dB Beamwidth	FCC: 60° +/- 3° (x-z plane), 120° +/- 3° (y-z plane)
	ETSI: 50° +/- 3° (x-z plane), 100° +/- 3° (y-z plane)
VSWR Across Frequency Range*	FCC: 2:1
	ETSI: 1.5:1
Pattern Variation (x-y plane)	FCC: 10 dBi
	ETSI: 1.5:1
Nominal Impedance	50 Ω
Electrostatic Discharge	2 kV (Human Body Model)

\* Some item-level applications - where the tag is close to the reader antenna - can cause a 2:1 VSWR from the antenna to the reader. Users should ensure that their reader can tolerate a VSWR as high as 2:1.

### 3.1.1 Field Plots

**Table 2: Threshold Antenna Radiation Patterns in FCC and ETSI**

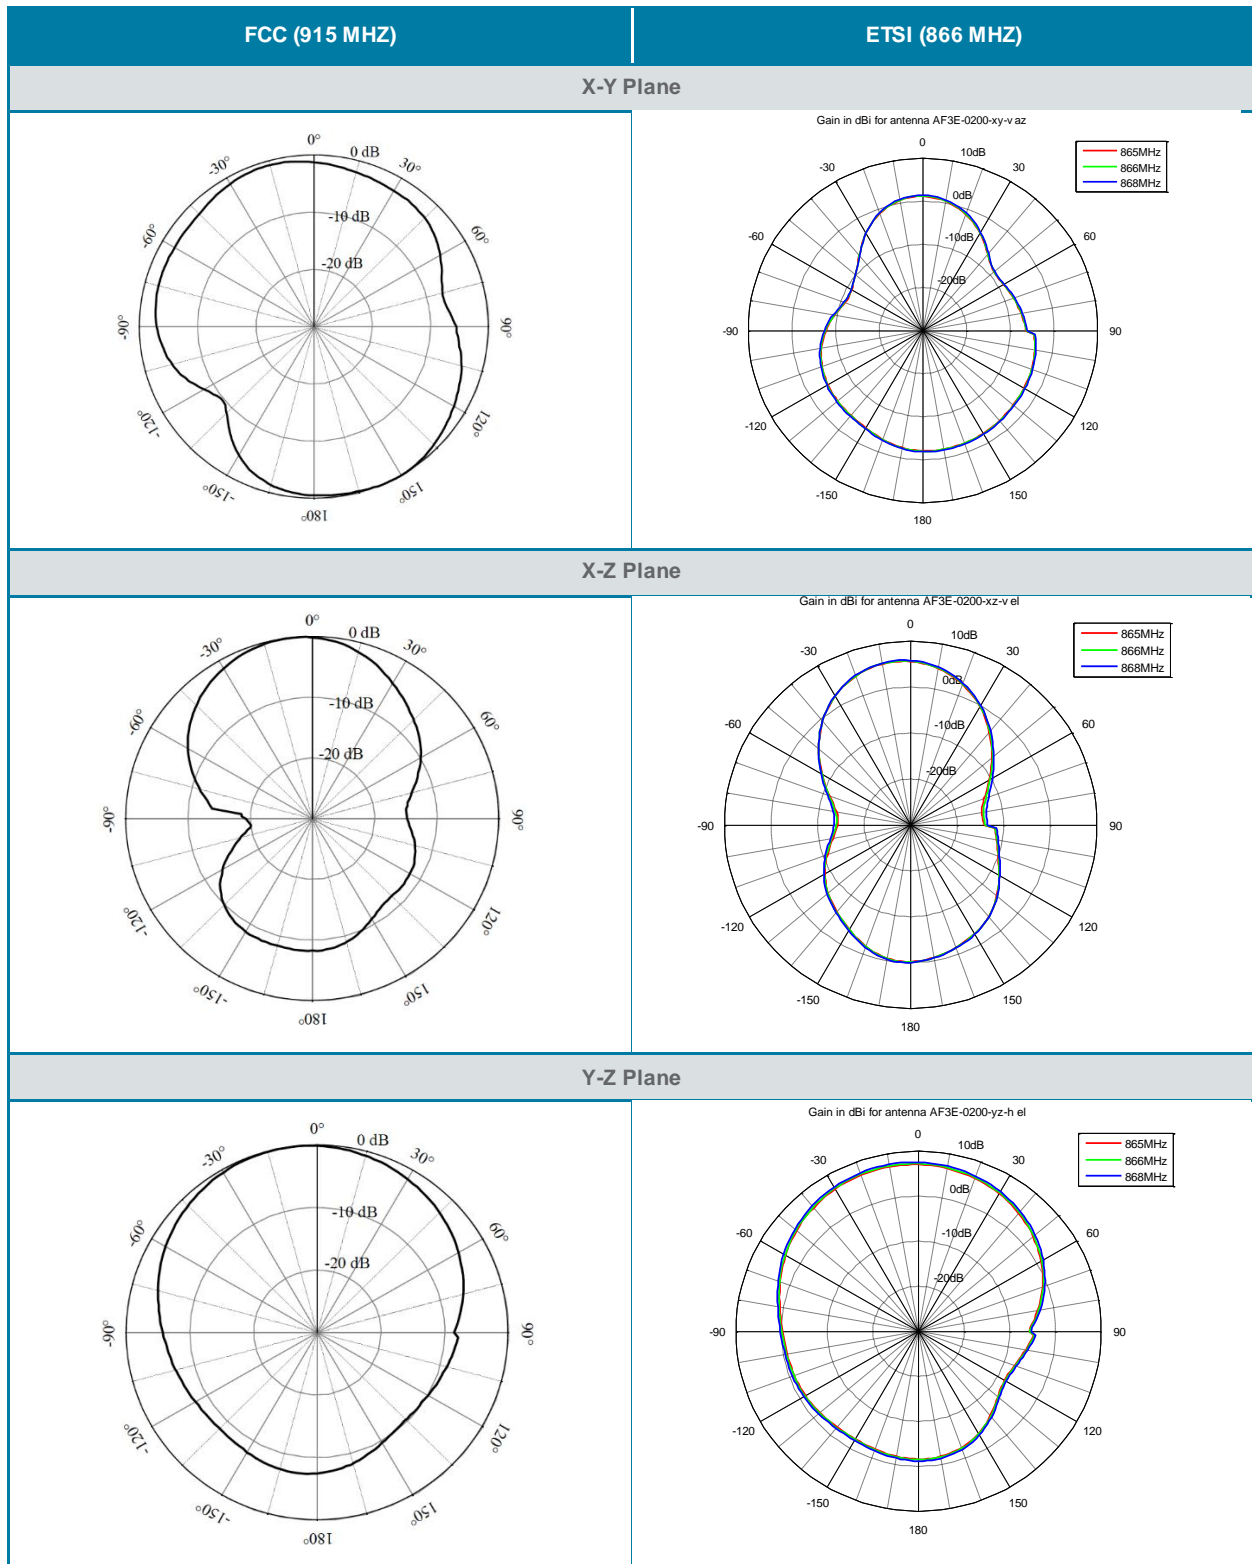

Please note that all radiation patterns are normalized. See mechanical dimension drawings to correlate the radiation patterns to the appropriate axes and planes of the antenna.

Figure 3: Radiation Pattern at 915 MHz (x-y plane)

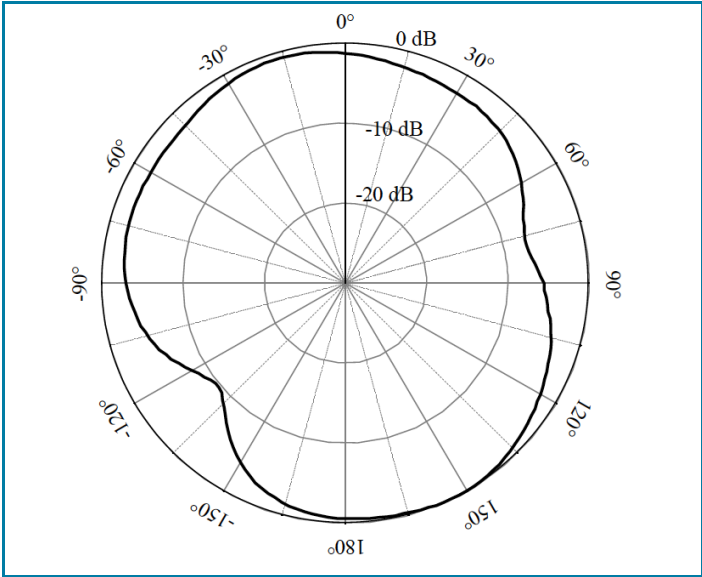


Figure 4: Radiation Pattern at 915 MHz (x-z plane)

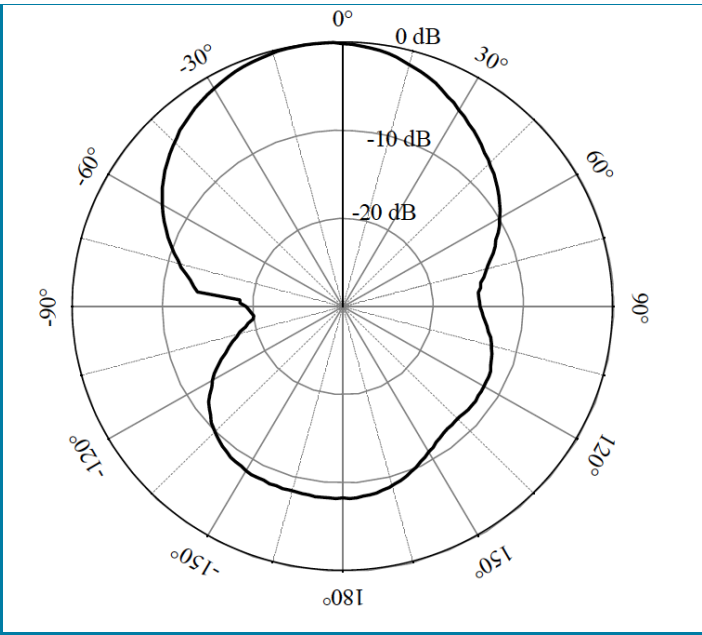


Figure 5: Radiation Pattern at 915 MHz (x-z plane)

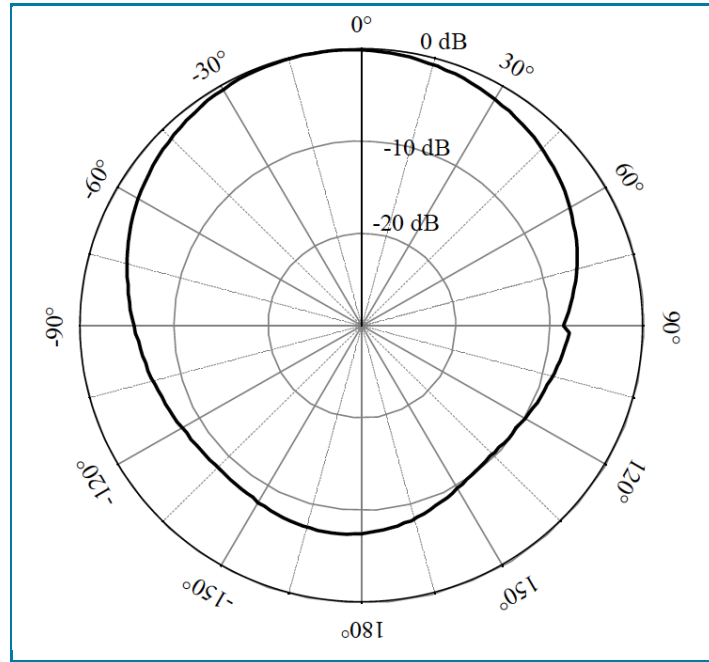
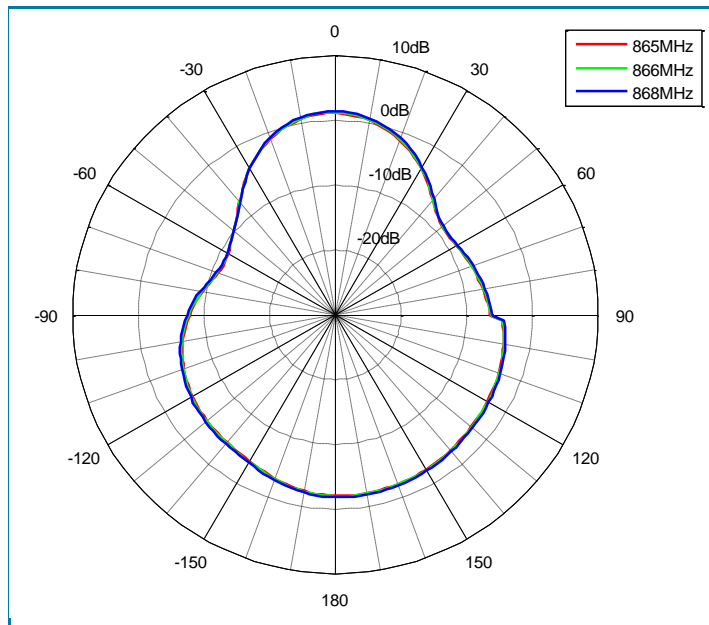
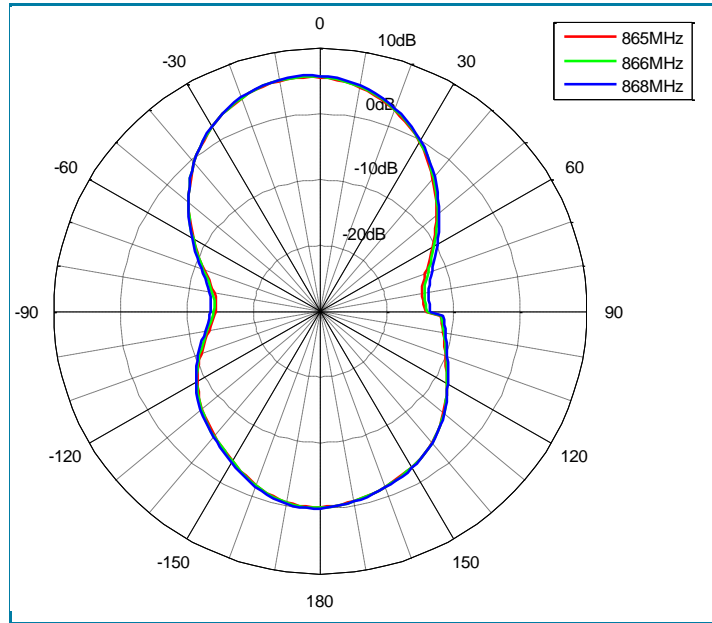



Figure 6: Radiation Pattern at 866 MHz (x-y plane)



**Figure 7: Radiation Pattern at 866 MHz (x-z plane)**



**Figure 8: Radiation Pattern at 866 MHz (y-z plane)**

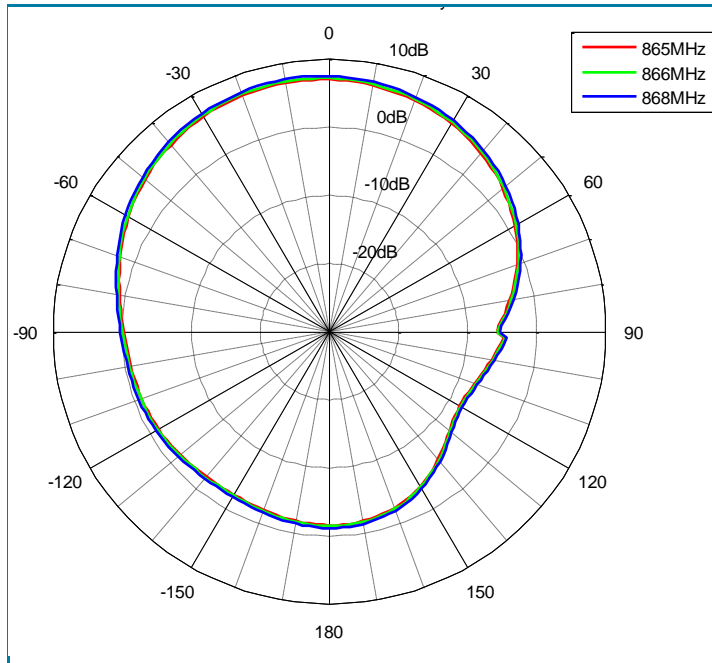



### 3.2 Environmental Specifications

**Table 3: Environmental Specifications**

PARAMETER	VALUE
Operating & Storage Temperature	-25 °C to 55 °C (-13 °F to 131 °F)
Humidity	5% to 95% (Relative, Non-Condensing)


### 3.3 Mechanical Specifications

**Table 4: Mechanical Specifications**

PARAMETER	VALUE
Dimensions (L x W x D)	18 in x 3.5 in x 0.75 in
	45.7 cm x 8.9 cm x 1.9 cm
Weight	1.57 lbs. (0.71 g)
Mounting	Recommended to be recessed within a cable mat
RoHS	RoHS Compliant
Radome	ABS
Enclosure	Bent sheet aluminium, clear finish
Connector Type	SMA female
Cable Length	305 mm (+/- 12 mm)

### 3.3.1 Mechanical Drawings

**Figure 9: Threshold Antenna Mechanical Drawing**

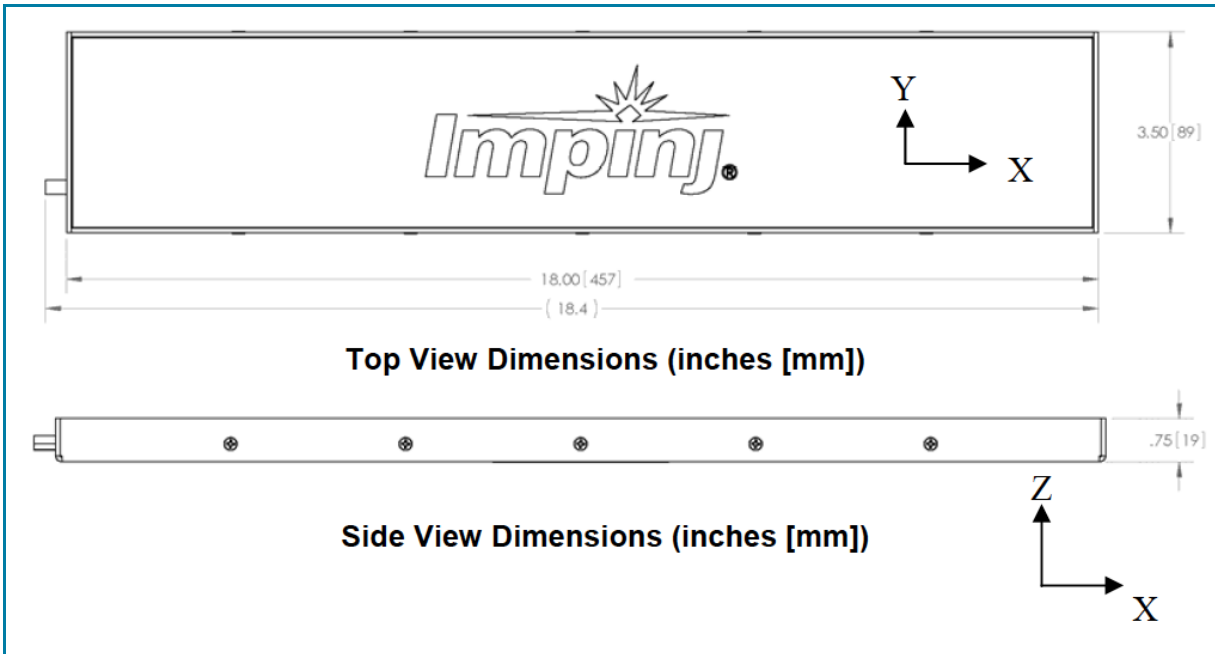

## 4 ORDERING INFORMATION

**Table 5: Ordering Information**

PART NUMBER	DESCRIPTION
IPJ-A0311-USA	Threshold Antenna (FCC)
IPJ-A0311-EU1	Threshold Antenna (ETSI)

## 5 NOTICES

Copyright ©2018, Impinj, Inc. All rights reserved.

Impinj gives no representation or warranty, express or implied, for accuracy or reliability of information in this document. Impinj reserves the right to change its products and services and this information at any time without notice.

EXCEPT AS PROVIDED IN IMPINJ'S TERMS AND CONDITIONS OF SALE (OR AS OTHERWISE AGREED IN A VALID WRITTEN INDIVIDUAL AGREEMENT WITH IMPINJ), IMPINJ ASSUMES NO LIABILITY WHATSOEVER AND IMPINJ DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATED TO SALE AND/OR USE OF IMPINJ PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT.

NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY PATENT, COPYRIGHT, MASKWORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT IS GRANTED BY THIS DOCUMENT.

Impinj assumes no liability for applications assistance or customer product design. Customers should provide adequate design and operating safeguards to minimize risks.

Impinj products are not designed, warranted or authorized for use in any product or application where a malfunction may reasonably be expected to cause personal injury or death, or property or environmental damage ("hazardous uses"), including but not limited to military applications; life-support systems; aircraft control, navigation or communication; air-traffic management; or in the design, construction, operation, or maintenance of a nuclear facility. Customers must indemnify Impinj against any damages arising out of the use of Impinj products in any hazardous uses.

Impinj, and Impinj products and features are trademarks or registered trademarks of Impinj, Inc. For a complete list of Impinj Trademarks, visit [www.impinj.com/trademarks](http://www.impinj.com/trademarks). All other product or service names may be trademarks of their respective companies.

The products referenced in this document may be covered by one or more U.S. patents. See [www.impinj.com/patents](http://www.impinj.com/patents) for details.